

Trusted tanks for every drop




Smarter by design




Unmatched quality



Reliable service

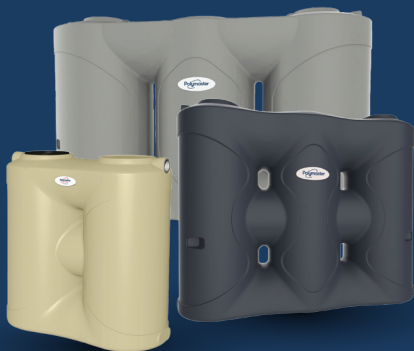

Slimline Water Tanks

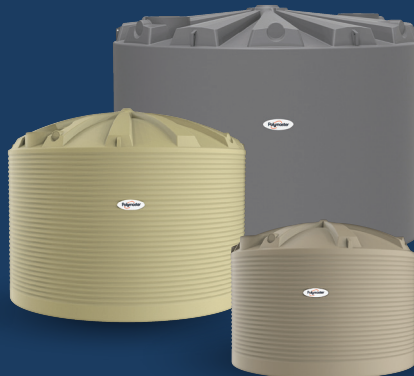

Round Water Tanks



Septic & Pump Stations



Welcome to the Polymaster Plumbing Range

Whether you're servicing homes or working on large-scale facilities,
you need tanks that are easy to install, built to last, and delivered on time.

That's what Polymaster delivers — **every drop of the way.**

Explore the full range of solutions for residential, commercial, and civil plumbing applications.

Water Tanks	Slimline, round and underground tanks from 200L to 50,000L
Septic Tanks	Fast-install poly septic tanks, pre-fitted and compliant
Pump Wells	Tough, one-piece wells with load-rated covers
Pump Stations	Pre-plumbed poly chambers for sewer and stormwater
Accessories	Pumps, filters and fittings to complete the install



Manufactured Locally

Australian made & operated since 1994



Custom Tank Builder

Industry leading technology to put you in control of your tank building journey



Product Certification

Built to the Rainwater tank Standard AS/NZS 4766:2006 for peace of mind. Licence no. BMP657671 & BMP650824



Fittings Standard

All Tanks come standard with fittings. Ask us what fittings come with the tank model you are interested in



Quality Assurance

Polymaster only produces quality products and service, certifying us for the International Standard ISO9001 for quality management



One Piece Tank Construction

With no joins or seams, our new generation roof design eliminates the need for an internal support pole



BPA Free

For your peace of mind



Messaging Service

Know where your tank is and when to expect its delivery



Food Grade

Our tanks are made from food-grade polyethylene and certified to AS/NZS4020, the Australian Standard for drinking water



Extra Thick Walls

Each Polymaster tank undergoes ultrasonic thickness testing and impact testing to ensure material is correct thickness



UV+ Double Strength

Our exclusive UV+ double strength resin gives the best protection against Australia's harsh sun



Delivery

Large fleet, fast turn around times & free to many sites.




Reliability

Our drivers take pride in getting our tanks exactly where you want them, when you need them



Store Locator


Looking for your nearest store? With our store locator you can find the nearest store to you.

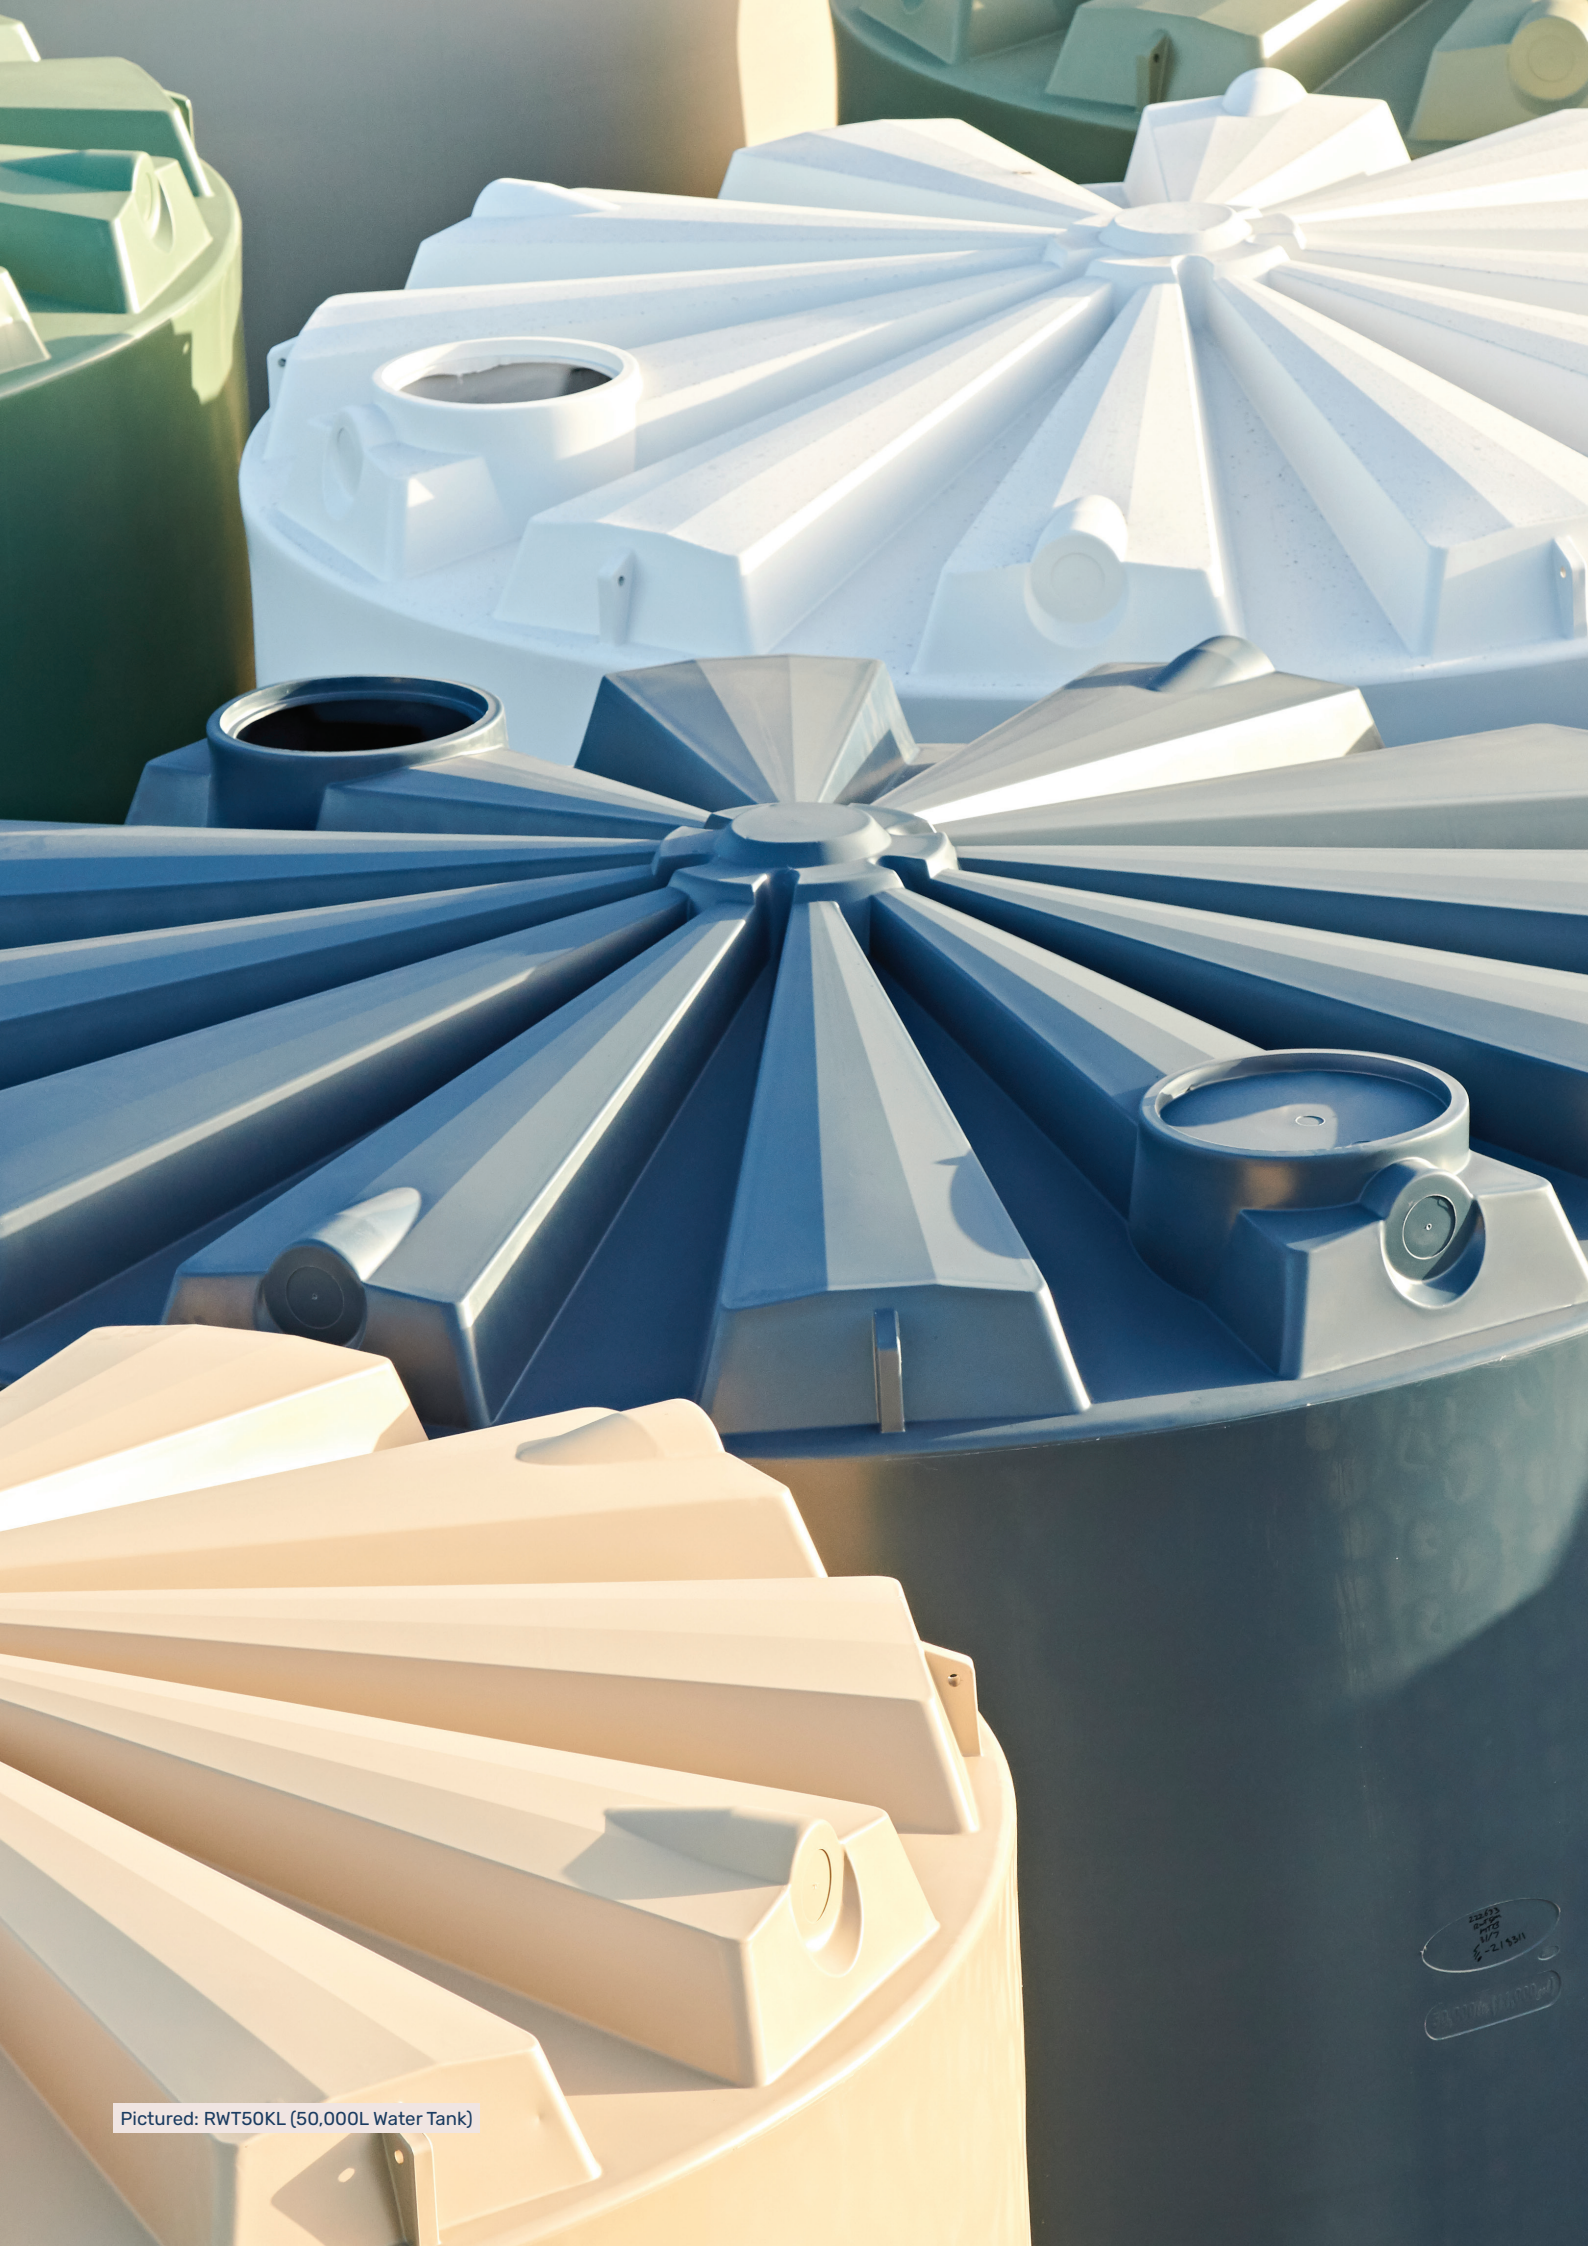

Pictured: RWT50KL (50,000L Water Tank)

Tank Colours

With so many choices of Colorbond® matched hues, we've made it easy to perfectly blend your new tank with your home or surroundings. This range takes the guesswork out of matching your tank colour with your exterior walls, guttering or roofing. No wonder this range is an Australian favourite.

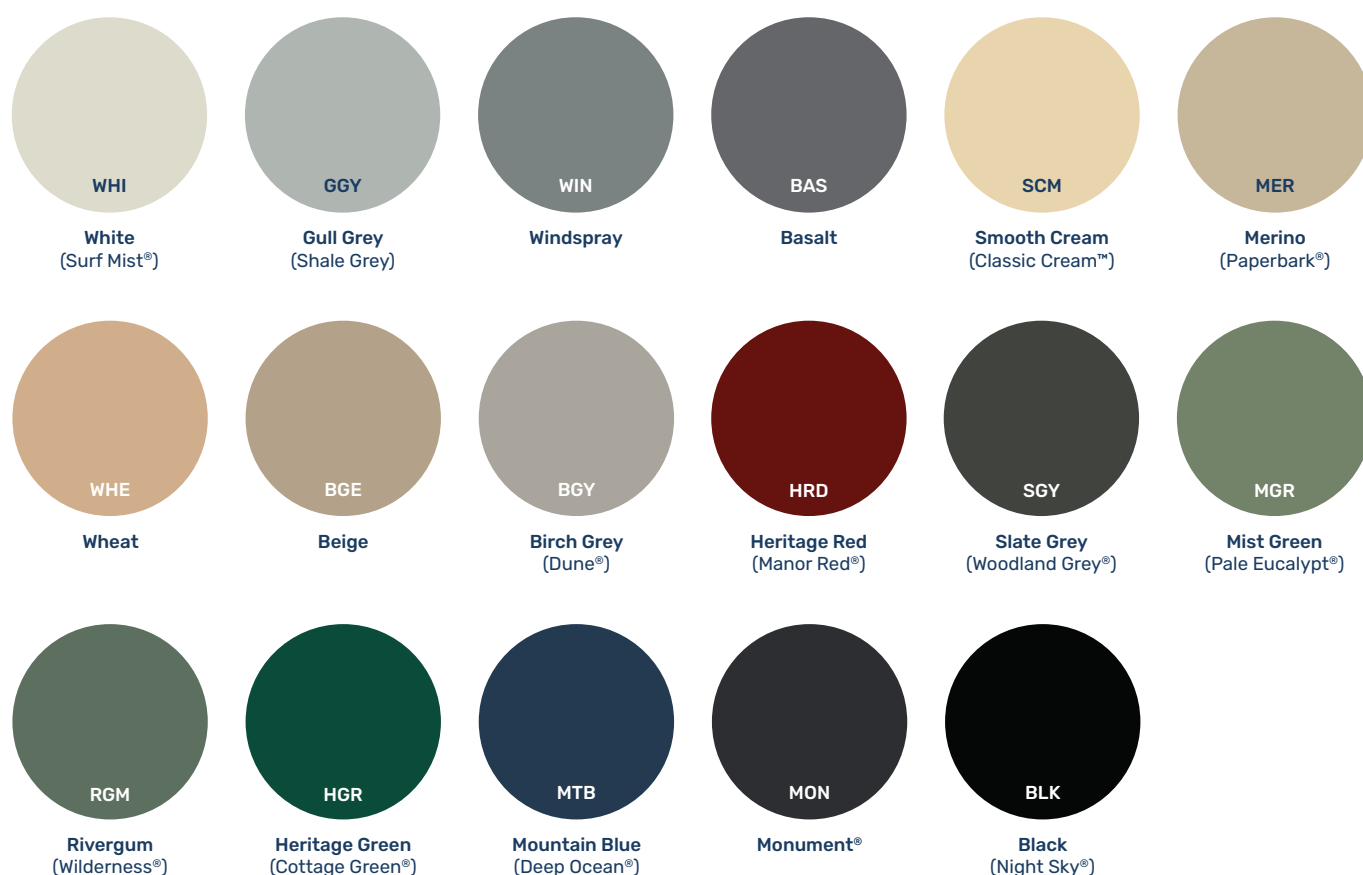


Contact us to discuss your colour project on 1800 062 064. Colours are shown for illustrative purposes only and may vary. Polymaster will not be held liable for incorrect colour impressions. Request your Polymaster colour sample to view colours. *COLORBOND® and colour names are registered trademarks of Blue Scope Steel Ltd.™ Polymaster tank colours represented match COLORBOND® steel colours. As we process our own resin we are able to offer a vast range of custom colours, available at an additional cost.

Water Tanks




Key Features

- Self supporting roof means no support poles are necessary
- One piece construction means no joins or seams
- Threaded outlet & ball valve as standard
- Upgraded outlet and ball valves are available at an additional cost
- Certified to AS/NZS 4766:2006 Standard
- Outlet position can be moved from standard based on positions on the 'Fit Out Clock' (below)
- Replacement manhole covers and strainers available
- Available in 17 Colours
- 90mm overflow as standard




Strainer



Overflow



Lifting Lugs





Threaded Outlet



Ball Valve

Dimensions

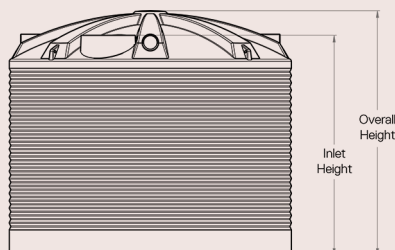


Fit Out Clock

Refer to table for what overflow positions are available for each tank size.



RWT50KL

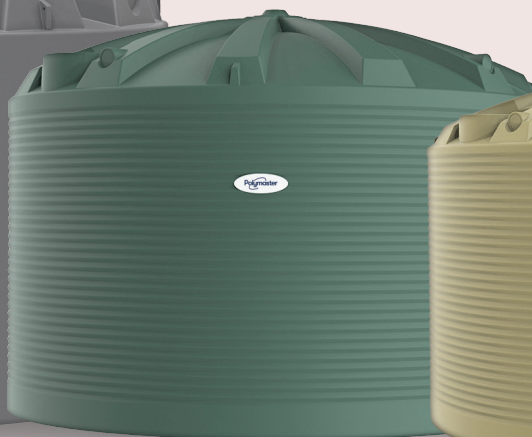

RWT31700



RWT22500

Premium Round Water Tanks

Code	Profile	Capacity (Litres)	Diameter	Overall Height	Inlet Height	Strainer Size	Overflow (Alternative)	Outlet Size	Upgrade Ball Valve & Outlet
RWT200	Corrugated	200	600	900	900	200 (S2)	12	25	40 - BV1.5A 50 - BV2A
RWT600	Corrugated	600	1000	950	950	200 (S2)	12	25	40 - BV1.5A 50 - BV2A
RWT1000	Corrugated	1,000	1000	1500	1500	200 (S2)	12	25	40 - BV1.5A 50 - BV2A
RWT1600	Corrugated	1,600	1250	1610	1500	300 (S3)	11/4	25	40 - BV1.5A 50 - BV2A
RWT2270T*	Corrugated	2,270	1300	2000	1920	300 (S3)	11/5	25	40 - BV1.5A 50 - BV2A
RWT2270LP*	Corrugated	2,270	1700	1310	1200	400 (S4)	11/4	25	40 - BV1.5A 50 - BV2A
RWT3300	Corrugated	3,300	1520	2100	2000	300 (S3)	11/4	25	40 - BV1.5A 50 - BV2A
RWT4500T*	Corrugated	4,500	1700	2200	2100	400 (S4)	11/4	25	40 - BV1.5A 50 - BV2A 80 - BV3A
RWT4500LP*	Corrugated	4,500	2150	1580	1380	400 (S4)	11/3/7	25	40 - BV1.5A 50 - BV2A 80 - BV3A
RWT5000	Corrugated	5,000	1950	2170	1960	400 (S4)	11/3/7	25	40 - BV1.5A 50 - BV2A 80 - BV3A
RWT7100	Corrugated	7,100	2150	2300	2120	400 (S4)	11/3/7	40	50 - BV2A 80 - BV3A
RWT9000	Corrugated	9,000	2500	2260	2050	400 (S4)	11.30/2.30/ 5.30/8.30	40	50 - BV2A 80 - BV3A
RWT13600	Corrugated	13,600	3100	2450	2100	400 (S4)	11/2/5/8	40	50 - BV2A 80 - BV3A
RWT22500	Corrugated	22,500	3560	2800	2470	400 (S4)	11.30/2.30/ 5.30/8.30	40	50 - BV2A 80 - BV3A
RWT31700	Corrugated	31,700	4100	3040	2610	400 (S4)	11.30/2.30/ 5.30/8.30	40	50 - BV2A 80 - BV3A
RWT50KL	Smooth	50,000	4600	3440	3290	500 (S5)	2/4/6/8/10/12	40	50 - BV2A 80 - BV3A

*T = Tall
*LP = Low Profile




Round Water Tanks




Key Features

- Outlet standard position is 6 o'clock
- Outlet position can be moved from standard based on positions on the 'Fit Out Clock' (below)
- Self supporting roof means no support poles are necessary
- One piece construction means no joins or seams
- Threaded outlet and ball valve as standard
- Upgraded outlet and ball valves are available at an additional cost
- Replacement manhole covers and strainers available
- Available in 17 Colours
- Certified to AS/NZS 4766:2006 Standard




Strainer



Overflow



Lifting Lugs



Threaded Outlet





Ball Valve

Product Range

Code	Profile	Capacity (Litres)	Diameter	Overall Height	Inlet Height	Strainer Size	Overflow (Alternative)	Outlet Size	Upgrade Ball Valve & Outlet
PCR2000	Smooth	2,000	1175	2255	2185	300 (S3)	10.30, 1.30, 4.30, 7.30	25	40 - BV1.5A 50 - BV2A
PCR4000	Smooth	4,000	1600	2200	2150	400 (S4)	10.30, 1.30, 4.30, 7.30	25	40 - BV1.5A 50 - BV2A
PCR5000	Smooth	5,000	1800	2200	2120	400 (S4)	10.30, 1.30, 4.30, 7.30	25	40 - BV1.5A 50 - BV2A
PCR7000	Smooth	7,000	2200	2200	2020	400 (S4)	10.30, 1.30, 4.30, 7.30	25	40 - BV1.5A 50 - BV2A
PCR10000	Smooth	10,000	2480	2350	2170	400 (S4)	10.30, 1.30, 4.30, 7.30	40	50 - BV2A 80 - BV3A
PCR13500	Smooth	13,500	2830	2630	2470	500 (S5)	10.30, 1.30, 4.30, 7.30	40	50 - BV2A 80 - BV3A
PCR22500	Smooth	22,500	3573	2879	2559	500 (S5)	10.30, 1.30, 4.30, 7.30	40	50 - BV2A 80 - BV3A
PCR27000	Smooth	27,000	3573	3339	3019	500 (S5)	10.30, 1.30, 4.30, 7.30	40	50 - BV2A 80 - BV3A

Dimensions



Fit Out Clock

Refer to table for what overflow positions are available for each tank size.



PCR27000

PCR13500

PCR4000



Pictured: RWT22500 (22,500L Water Tank)

Slimline Tanks & Pump Options



Key Features


- Space saving modern design
- 25mm threaded outlet
- Moulded handgrips for easy lifting
- 90mm overflow
- Available in 17 Colours
- Certified to AS/NZS 4766:2006 Standard

Pump Information

Automatic Rain/Mains water changeover device designed for pressure pump supply systems in harvesting rainwater for the toilet, laundry and household applications with automatic mains backup.

*Refer to Page 17 for Pump Details.

Dimensions

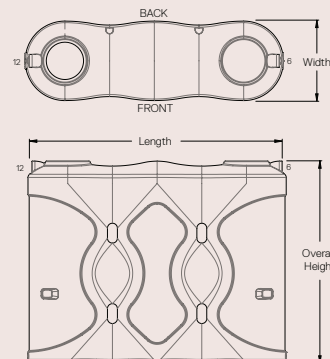

Product Range

Tank Only	Tank + Household Pump (HHR-370S-PC)	Tank + Garden Pump (DHJ600)	Capacity	Dimensions (L X W X H)
PCST600	-	-	600	1220 x 580 x 1265
PCST1050	PCST1050AP	PCST1050GPS	1050	1460 x 690 x 1515
PCST2000	PCST2000AP	PCST2000GPS	2000	2370 x 600 x 2010
PCST3000	PCST3000AP	PCST3000GPS	3000	2570 x 790 x 2050
PCST5000	PCST5000AP	PCST5000GPS	5000	3290 x 1020 x 2010

*GPS models include separate pump cover (PC01)

Capacity (Litres)	Strainer (mm)	Overflow Position	Outlet Position	Outlet Size	Manhole Cover
600	300 (S3)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC9
1050	400 (S4)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC8
2000	400 (S4)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC8
3000	400 (S4)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC8
5000	400 (S4)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC8



PCST600

PCST1050

PCST2000

PCST3000

PCST5000

Builders Tanks



Key Features

- 10 minute quick install – pump built in, just hook it up
- Moulded handgrips for easy lifting
- 2 x 90mm overflows + 1 cap
- 2 x outlets + 1 cap
- Certified to AS/NZS 4766:2006 Standard
- Flexihose 20mm x 600mm female thread
- Hoses for connection at approximately 400mm high
- Available in 17 colours
- Fits through a standard doorway

Pump Information

Automatic hydraulic Rain/Mains water changeover device designed for pressure pump supply systems in harvesting rainwater for the toilet, laundry and household applications with automatic mains backup.

*Refer to Page 17 for Pump Details.


Standard Fittings




Pump pre-installed with rain/mains changeover




Flexible hoses for quick connection



Leaf & mosquito proof mesh screen



2 x Large 90mm overflows (1 each end) + 1 cap



2 x 25mm outlets (1 each end) + 1 plug




Cover to conceal pump

Builders Tank & Pump Packages

Code	Pump Capability	Capacity (Litres)	Pump Code	Length	Width	Height	Overall Height	Outlet (Position)	Outlet Size	Pump Inlet/Outlet Height
BSLT2020H4	Single Storey Dwellings	2,020	MHR20-370	2105	735	2010	2010	6&12	25	820
BSLT2020H5	Double Storey Dwellings	2,020	MHR20-550	2105	735	2010	2010	6&12	25	820

Code	Description
BSLT2020PC	Pump Cover for BSLT2020
MHC8	Inspection Cover 400mm
S4	Inlet Strainer 400mm

Dimensions

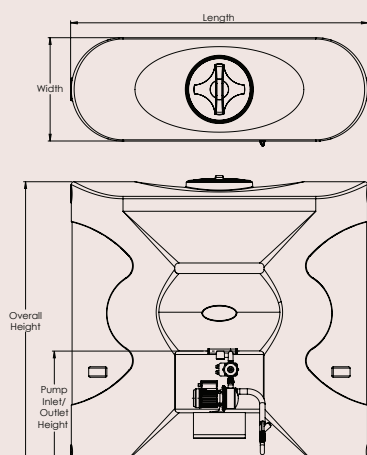

BSLT2020H4

Underground Tanks



Key Features

- Child-proof lid secured with tamper proof screws
- Self-anchoring
- Low profile design - minimal excavation required
- Rubber ring seal fitting provided for pipe connection.
- Tank to tank connection point
- Certified to AS/NZS 4766:2006 Standard

Product Range

Code	Description	Capacity (Litres)	Length	Width	Height
URT3300B	Tank Only	3,300	2470	1640	1665
URT5000B	Tank Only	5,000	3520	1640	1665
URT3300VF	Tank with Vortex Filter	3,300	2470	1640	1665
URT5000VF	Tank with Vortex Filter	5,000	3520	1640	1665
URT3300VF/PC	Tank with Vortex Filter & submersible pump + auto changeover device	3,300	2470	1640	1665
URT5000VF/PC	Tank with Vortex Filter & submersible pump + auto changeover device	5,000	3520	1640	1665
URT3300VF/GP	Tank with Vortex Filter & garden pump + press control	3,300	2470	1640	1665
URT5000VF/GP	Tank with Vortex Filter & garden pump + press control	5,000	3520	1640	1665


Pump Details

Type	Voltage	Power (KW)	Head	Flow	Warranty
Submersible Pump (PC)	220-240v	0.37kW (370 watts)	36m	82LPM	2 years
Garden Pump (GP)	220-240v	0.37kW (370 watts)	36m	82LPM	2 years

Accessories

Code	Description
URRM	500mm Riser - for deeper installations
U-LID	Lid to suit Underground Tanks
LID-CD	Heavy Duty Class D Lid


Dimensions

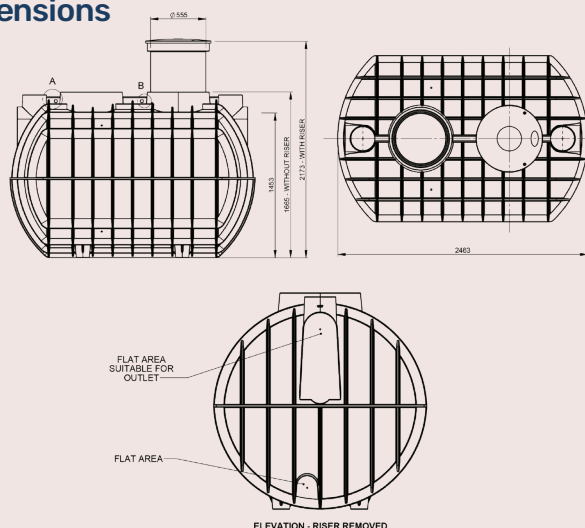

Vortex Fine Filter

Self cleaning filter removes sediment and debris, providing you with clean water for storage. Wall mounting bracket available.

Example Setup Underground Tank with Vortex Filter and Submersible Pump options:

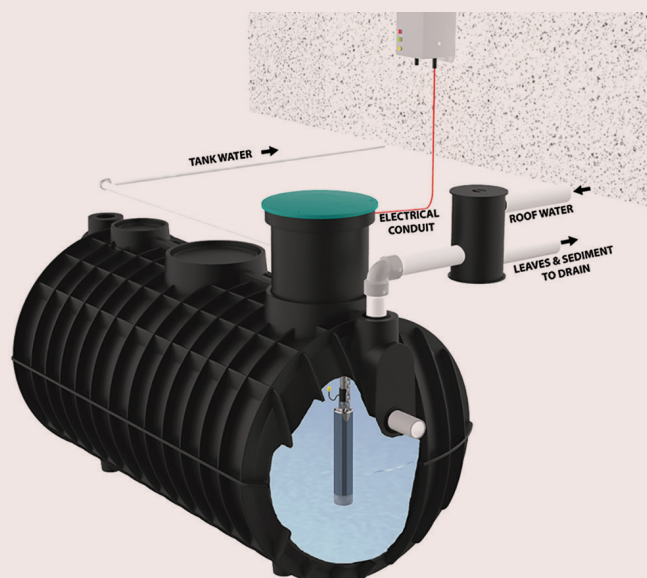



Pictured: ST3100 (3,100L Septic Tank) & PS700-STM (700L Pump Station - Stormwater/Grey Water)

Septic Tanks



Key Features


- Self anchoring – does not require concrete
- Fittings and baffle pre-installed
- Certified for NSW, VIC, SA, QLD, NT
- 10 minute hook up
- Low profile design – minimal excavation required
- One piece construction
- 100mm inlet and outlet pre-installed
- Heavy duty lid tested to 500kg loading
- 500mm riser extension available
- Certified to AS/NZS 1546.1:2008 Standard

Product Range

Code	Capacity (Litres)	Weight (kg)	Length	Width	Height	Inlet Size	Outlet Size	No. of Persons
ST3100	3,100	200	2470	1640	1700	100	100	1-5 people
ST4550	4,550	325	3520	1640	1700	100	100	6-10 people

Accessories


Code	Description
U-LID	Lid to suit Septic Tank
URRM	500mm Riser - for deeper installations
LID-CD	Heavy Duty Class D Lid




Class D Lid Available



Fittings & Baffle Pre-Assembled



Heavy Duty Lid





Optional Riser Available




Dimensions

*Collection wells also available

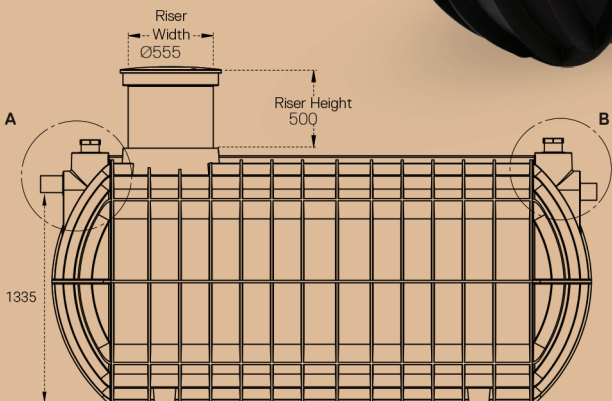

DETAIL A (INLET)



DETAIL B (OUTLET)

Pump Wells



Key Features


- Round / square lids available
- Optional riser available
- Class D heavy duty lid available
- Variable Inlet / outlet heights
- Tough rotationally moulded polyethylene vessel
- Designed & certified to AS/NZS 1546.1:2008 Standard
- Flat base, perfect for pump to sit on
- One piece construction
- Rubber ring seal fitting provided for pipe connection.

Product Range


Capacity (Litres)	Tank w/Round Lid	Dimensions (mm)	Tank w/Square Lid	Dimensions (mm)
700	PW700-RND	1090 DIA x 1313H	PW700-SQR	1090 DIA x 1255H
1,000	PW1000-RND	1090 DIA x 1703H	PW1000-SQR	1090 DIA x 1645H
1,300	PW1300-RND	1090 DIA x 2093H	PW1300-SQR	1090 DIA x 2035H

Accessories

Code	Description
U-LID	Lid to suit Pump Well
URRM	500mm Riser - for deeper installations
LID-CD	Heavy Duty Class D Lid



Class D Lid Available




Square Lids Available



Optional 500mm Riser Available

Round / Square lids available
- Optional riser
- Class D (heavy duty) lid available

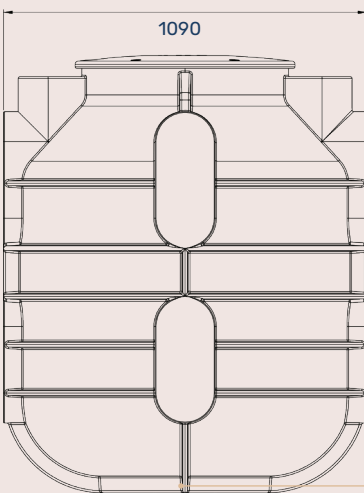

PW700-RND



PW700-RND

Lifting Points

Variable Inlet / Outlet heights

Tough rotationally moulded polyethylene vessel

Designed & Certified to AS/NZS 1546.1:2008 Standard

Flat base, perfect for pump to sit on

Pump Stations



Pre-installed stand with mount for:

- High level visual and audible liquid alarm
- Outdoor power point for electrical connectivity

Pump is easily lifted out via the PVC without touching liquid

Lid load-rated to 500kg

Lifting lugs

Brass fitting with 40mm Poly Pipe connector

Completely pre-plumbed with ball valve, swing check valve & barrel union


Ribbing adds strength & creates self-anchoring tank

High level alarm float switch

Large flat spots around chamber to provide variable inlet positions

Stormwater / grey water pump

*sewer / black water pump also available

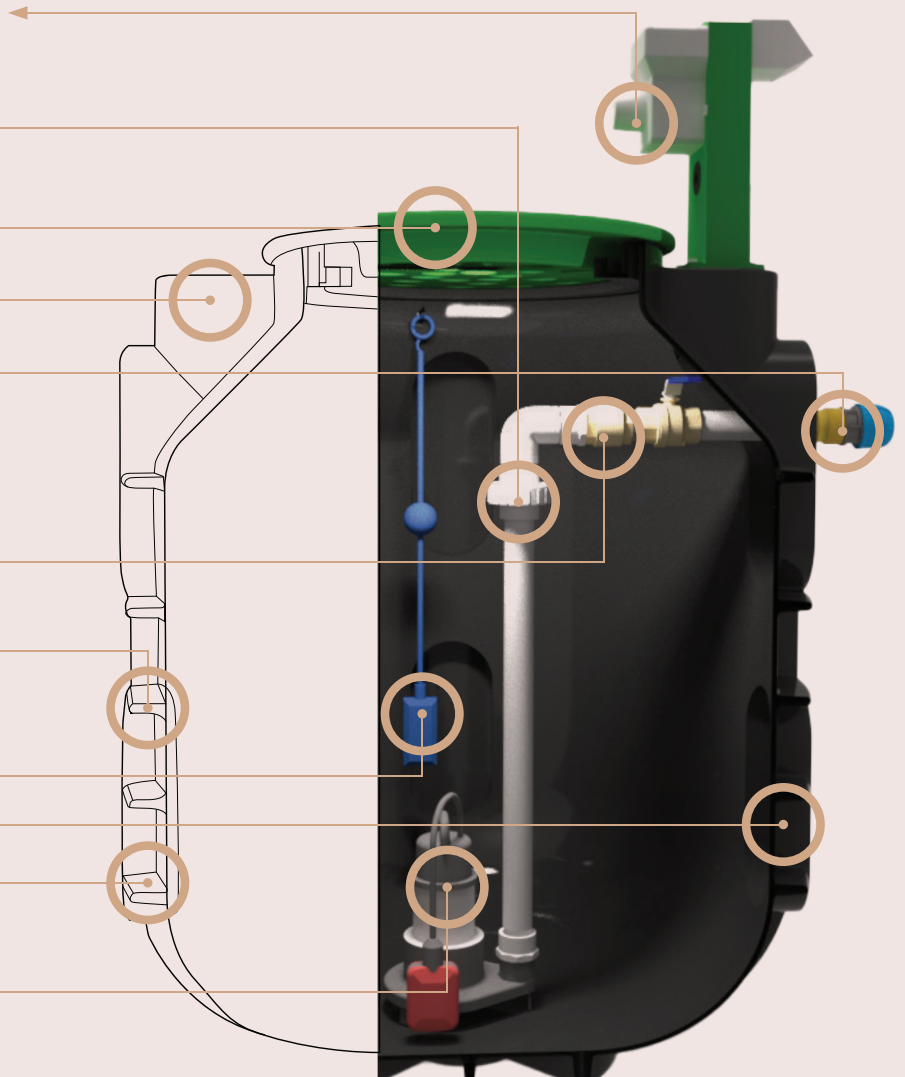

Capacity (Litres)	Stormwater / Grey Water	Sewer / Black Water	Dimensions (mm)
700	PS700-STM	PS700-SWR	1090 DIA x 1650H
1000	PS1000-STM	PS1000-SWR	1092 DIA x 2030H
1300	PS1300-STM	PS1300-SWR	1094 DIA x 2420H

Code	Description	AMPS	Max Flow (L/MIN)	Power	Outlet	Warranty
PUMP-SSP-STM	Stormwater / Grey Water Sump Pump	2	200	240V	40	2 years
PUMP-SSP-SWR	Sewer / Black Water Grinder Pump	9.5	350	240V	50	1 year

Water Pumps

Household Pumps with Brass Rain/Mains Changeover Device

Code	Description	Wattage	Max Flow (LPM)	Power (kW)	Inlet	Outlet	Warranty
MHR20-370	Single Story Pump	370W	55	0.37	25mm BSPF	20mm BSPF	3 years
MHR20-550	Double Story Pump	550W	70	0.55	25mm BSPF	20mm BSPF	3 years

Submersible Pumps

Code	Description	Wattage	Max Flow (LPM)	Power (kW)	Inlet	Outlet	Warranty
HHR-370S-PC	Pump & Press Control	370W	82	0.37	5m	20mm BSPM	2 years
HHR-370S-PC+CO	Pump w/ Press Control & Change-over Device	370W	82	0.37	5m	32mm BSPF	2 years

Garden Pumps with Press Control

Code	Description	Wattage	Max Flow (LPM)	Power (kW)	Inlet	Outlet	Warranty
DHJ600	Pump & Press Control	600W	45	0.6	25mm BSPF	25mm BSPM	2 years
DHJ800	Pump & Press Control	800W	55	0.8	25mm BSPF	25mm BSPM	2 years
HSJ1000	Pump & Press Control	1000W	85	1	25mm BSPF	25mm BSPM	3 years



HHR-370S-PC



HHR-370S-PC+CO



MHR20-370



MHR20-550



DHJ600



DHJ800



HSJ1000

Accessories

Inspection Covers

Code	Description
MHC1	Inspection Cover for 13,600L to 31,700L RWT Tanks
MHC3	Water Entry Cover for Tanks with 400mm Sieve
MHC4	Inspection Cover for Tanks with 400mm Sieve
MHC5	Inspection Cover for RWT3300 , RWT2270T and RWT1600 Tanks
MHC6	Inspection Cover for RWT1000 , RWT600 and RWT200 Tanks
MHC8	Inspection Cover for Slimline Tanks 1,050L, 2,000L, 3,000L and 5,000L
MHC9	Inspection Cover for 600L Slimline Tank
MHCA	Inspection for 13,500L to 27,000L PCR Tanks + RWT50KL



MHC1

Water Level Indicators

Code	Description
DPK1	Dipstick
DPK1EXT	Dipstick Extension for 50KL Tank
LT01	Levetator - Water Level Indicator
LQ02	Liquidator - Level Indicator Suitable for Corrosive Liquids



DPK1

Other Rainwater Accessories


Code	Description
LGSO	Leaf Guard - Swivel Outlet
LWD	Downpipe Water Diverter
OFF9	90mm Overflow Flanged
OFP	Plug To Fit 90mm Overflow
OS9	90mm Overflow Screen
OFF10	100mm Overflow Flanged
PC01	Pump Cover 700L x 450W x 560H mm



LT01

Underground Tank Accessories

Code	Description
URRM	500mm Riser - For Deeper Installations
U-LID	Lid To Suit Underground Tanks
R10112	Uniseal 100mm



PC01

Vortex Self-Cleaning Fine Filters


Code	Description
URVF01	Vortex Filter Suitable For Roof Areas Up To 200Sq Metres
URVF15	Vortex Filter Suitable For Roof Areas Up To 500Sq Metres
URVF30	Vortex Filter Suitable For Roof Areas Up To 3000Sq Metres
URVFR	Riser Only - For Vortex Self Cleaning Filter
URVFWM	Vortex Filter Wall Mount



URVF01

Inlet Strainers

Code	Description
S2	Sieve 200mm
S3	Sieve 300mm
S4	Sieve 400mm
S5	Sieve 500mm

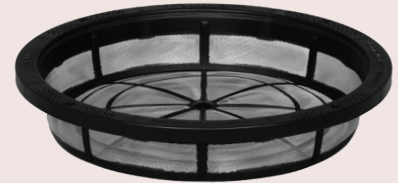

S4

Rural Fire Tank Fittings


Code	Description
CFA1	65mm CFA Coupling Only (VIC)
CFA2	65mm CFA Coupling complete with 50mm (2") Outlet & Ball Valve
CFAC	Cap to suit CFA1
CFS1	65mm CFS Coupling Only (SA)
CFS2	65mm CFS Coupling (SA) Complete with 50mm (2") Outlet & Ball Valve
RFS	Rural Fire Service Fitting (NSW)
RFS2	RFS Coupling Complete (VIC Metro, NSW Rural)



AFV2LB

Fittings for Pipeline Tanks

Code	Description
AFV2L-A	25mm (1") plastic Sleeve Valve - Long Arm
AFV2LB	25mm (1") including Female Tank Outlet, Plastic Sleeve Valve - Long Arm
AFV4B	40mm (1½") Plastic Sleeve Valve - High Volume incl Female Tank Outlet. Pressure range 0 - 450kpa (0 - 65psi)
AFV5B	50mm (2") Plastic Sleeve Valve - High Volume incl Female Tank Outlet. Pressure range 0 - 450kpa (0 - 65psi)
PLTIP25	Pipeline Tank Internal Pipework 25mm
PLTIP40	Pipeline Tank Internal Pipework 40mm
PT2140	40mm (1 1/2") Dual Level reservoir valve
PT2150	50mm (2") Dual Level reservoir valve



LH01.5



BV1.5

Outlets

Code	Description
LH01	25mm (1")
LH01.5	40mm (1.5")
LH02	50mm (2")
LH03	(3") 80mm M

Ball Valves

Code	Description
BV1	25mm (1")
BV1.5	40mm (1.5")
BV2	50mm (2")
BV3	80mm (3")

Tank Inlet Filter

Code	Description
TIF3	Tank Inlet Filter 300mm including Sieve
TIF4	Tank Inlet Filter 400mm including Sieve



TIF4

Delivery & Installation

It is the owner's responsibility to provide clear access to site, and to secure tank/s left at site.

If the driver cannot reach the desired location, the tank/s will be left in the closest and safest location deemed possible by our driver. If the tank/s can not be left at site, the owner will incur a redelivery charge.

All products can be delivered throughout Australia. Call us for a quote for deliveries outside nominated zones.

Delivery Requirements

Clearance required for truck and trailer is 19m long, 5m high, 3.5m wide. To put this into perspective, our trucks are longer than a semi-trailer.

It is the Owners responsibility to position the tank on the pad and to connect the tank.

Large and/or bulky products will require a lifting device (forklift etc) to unload from the truck. This is not supplied by the driver.

Re-Scheduling Fee

Please be advised that if the Owner chooses to change the delivery date a re-scheduling fee may be incurred.

For more information visit <https://www.polymaster.com.au/news/requirements-for-tank-deliveries/>

Polymaster Tank Installation Guide

1. No Entry Required

Installation of a Polymaster tank does not require entry into the tank.

2. Tank Site Preparation

The site must be firm, level, and flat. A concrete pad or a well-compacted sand base (75mm–100mm deep) is recommended. Other suitable bases include crushed dust or consolidated fill, free of rocks, stones, or sharp objects. The base should extend 600mm beyond the tank's diameter. A retaining wall should support the base's perimeter to prevent erosion.


3. Overflow & Drainage

The overflow must be piped away from the tank to avoid undermining the base.

4. Plumbing & Pipework

A flexible hose (minimum 300mm/12") must be installed after the tank valve to absorb shocks and movement.

If the tank is placed on a stand, do not support any pipework directly from the tank. Note: Failure to properly install tank as per instructions will void warranty. Never enter a tank alone. Have an attendant stand by. Restricted Space - only enter after carrying out a Hazard Identification Risk Assessment (H.I.R.A.).

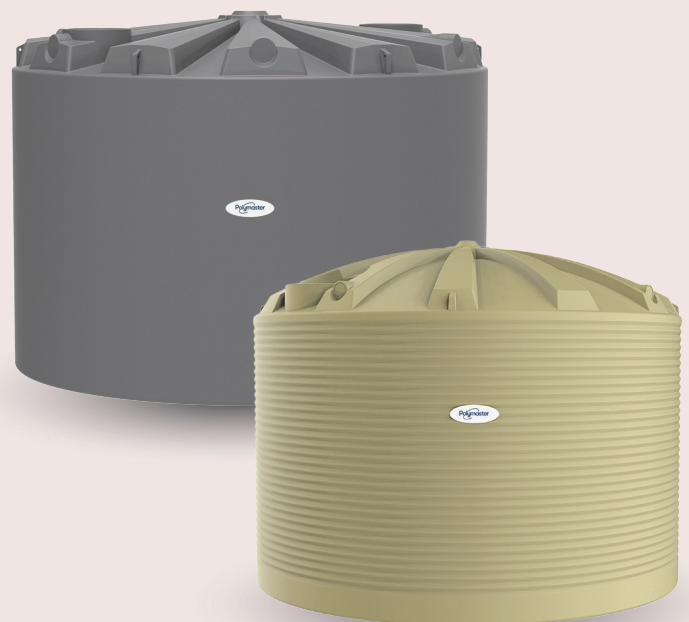

Free Delivery (Within Zone 1)

Polymaster offers free delivery to site throughout most of Victoria, South Australia and parts of New South Wales & Queensland for tanks exceeding 13,000Ls (within zone 1). Please refer to our free delivery zone map on polymaster.com.au/delivery-installation.

All tanks less than 13,000L are delivered free to store (within zone 1).
A delivery fee will be incurred to deliver these tanks to site.

Note: Not all products are available in QLD and Nthn NSW





With over 30 years of manufacturing experience, Polymaster is trusted across Australia for reliable water storage, septic, and stormwater solutions. Our plumbing range is engineered for performance and peace of mind — made to fit your schedule, your jobsite, and your standards. Trusted by plumbers for every drop.





1800 062 064
polymaster.com.au

Follow us: Polymaster Group



PUB-2025-07