



DEF Tanks (For AdBlue®)

Why choose Polymaster?

At Polymaster, we use only top-grade materials, rigorously trialled and tested throughout the design and manufacturing process. Our products meet global quality and process certifications, ensuring reliability and excellence. Manufactured in our purpose-built facilities, we maintain full control over the entire process, from raw material selection to the final product - guaranteeing superior quality at every stage.



Manufactured Locally

Australian made & operated since 1994



Custom Tank Builder

Industry leading technology to put you in control of your tank building journey



Product Certification

Built to the Rainwater tank Standard AS/NZS 4766:2006 for peace of mind. Licence no. BMP657671 & BMP650824



Fittings Standard

Rainwater Tanks come standard with fittings. Ask us what fittings come with the tank model you are interested in



Quality Assurance

Polymaster only produces quality products and service, certifying us for the International Standard ISO9001 for quality management



One Piece Tank Construction

With no joins or seams, our new generation roof design eliminates the need for an internal support pole



BPA Free

For your peace of mind



Messaging Service

Know where your tank is and when to expect its delivery



Food Grade

Our tanks are made from food-grade polyethylene and certified to AS/NZS4020, the Australian Standard for drinking water



Extra Thick Walls

Each Polymaster tank undergoes ultrasonic thickness testing and impact testing to ensure material is correct thickness



UV+ Double Strength

Our exclusive UV+ double strength resin gives the best protection against Australia's harsh sun



Delivery

Large fleet, fast turn around times & free to many sites. See Delivery & Installation for full details - page 68-69.



Reliability

Our dedicated drivers and logistics team keep you informed every step of the way, ensuring a smooth delivery process.



Store Locator

Looking for your nearest store? With our store locator you can find the nearest store to you.

Ute Packs & Accessories



Portable Ute Packs

Code	Description	Capacity (Litres)	Dimensions (L x W x H)	Pump	Pump Flow	Hose Length
BM200B-P12	Tank + 12 Volt Pump Kit	200	1000 x 750 x 605	B12VP-P	35	4
BM400B-P12	Tank + 12 Volt Pump Kit	400	1620 x 750 x 665	B12VP-P	35	4



200L



400L

Accessories

Code	Description
BATN-P	AdBlue® Auto Shutoff Nozzle (Piusi)
BDM-P	AdBlue® Digital Meter
BMCB-A	AdBlue® McBox
BMHR8-P	AdBlue® Hose Reel Retractable 20mm x 8m
BMLI	Level Indicator (Ocio) AdBlue®
BMTN-P	Nozzle Manual AdBlue® - Plastic Piusi



BMCB-A



BATN-P



BDM-P

Single Skin Storage Tanks



Key Features

- External Liquid Level Indicator
- SS Pipework
- 2" SS Dry Break
- 2" Outlet and Ball Valve
- Earthing Rod
- Breather Vents
- Screw Lid - Inspection Hatch

Round Tanks

Code	Capacity (Litres)	Dimensions (MM)
BMS2000RPB	2,000	1175 Dia x 2355H
BMS4000RPB	4,000	1600 Dia x 2300H
BMS5000RPB	5,000	1800 Dia x 2300H
BMS7000RPB	7,000	2200 Dia x 2300H
BMS10000RPB	10,000	2480 Dia x 2450H



BMS5000RPB

Slimline Tanks

Code	Capacity (Litres)	Dimensions (L x W x H)
BMSL2000RPB	2,000	2590 x 750 x 2110
BMSL3000RPB	3,000	2870 x 940 x 2150
BMSL5000RPB	5,000	3590 x 1170 x 2110



BMSL5000RPB



AdBlue® Level Gauge



SS Pipework & 2" SS Dry Break



2" Outlet and Ball Valve

Single Skin Slimline Tank + Cabinet

Key Features

- Optimised Fleet Solutions for AdBlue® storage and dispensing to SCR/DEF equipped vehicles.
- Slimline Submersible Pump Available in Calpeda or Franklin options
- Simplifies dispensing operation
- Plug 'n' play set up for fast installation



BMSL5000GY-C

Code	Description	Capacity (Litres)	Dimensions (L x W x H)	Pump	Pump Flow	Hose Length
BMSL5000LG-C	Slimline AdBlue® Tank + Cabinet	5,000	4140 x 1170 x 2110	B240VP-P	35	5



Self Bunded Tanks


Three models available: DEPOT, TERMINAL, SUBMERSIBLE



Cabinet Details Depot Range



Terminal Range Standard Features



8m Hose Reel




MC Box (User management system)

Bunded Tanks Comparison Chart

Features	Depot	Terminal	Submersible
Australian made	•	•	•
110% Bund capacity	•	•	•
Bund alarm	•	•	•
Digital tank volume measurement	•	•	•
50mm (2") Stainless Steel Drybreak (fill)	•	•	•
Mechanical Overfill protection	•	•	•
High/Low level audible alarms	•	•	•
Power control panel with emergency stop	•	•	•
Earth rod	•	•	•
Auto timeout - 10mins	•	•	•
Lockable cabinet	•	•	•
Digital delivery meter	•	•	
120 User Piusi fuel management system		•	
5mtr delivery hose	•		
8mtr retractable delivery hose reel	Optional	•	
Auto shut off nozzle and holster	•	•	
25mm Discharge line terminated in the cabinet			•
Warranty	5yr on Tank	5yr on Tank	5yr on Tank
240V - 35LP Piusi AdBlue® Pump	Standard	Standard	
12V - 35LPM Piusi AdBlue® Pump	Optional		
240V - Calpeda Submersible AdBlue® Pump			Standard
Globe valve to regulate flow rate			•
ATG Probe Tube	Optional	Optional	Optional

Speci ication Self Bunded Tanks

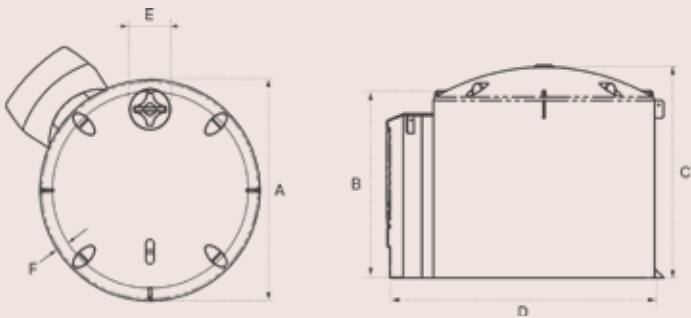

Code	Capacity (Litres)	A (mm)	B (mm)	C (mm)	D (mm)
BMDS2300	2300	1600	2160	2200	2120
BMDS3300	3300	1800	2130	2200	2300
BMDS5000	5000	2200	2080	2260	2750
BMDS7000	7000	2500	2190	2350	3070
BMDS10000	10,000	2500	2520	2710	3062

Delivery & Installation

It is the owner's responsibility to provide clear access to site, and to secure tank/s left at site.

If the driver cannot reach the desired location, the tank/s will be left in the closest and safest location deemed possible by our driver. If the tank/s can not be left at site, the owner will incur a redelivery charge.

All products can be delivered throughout Australia. Call us for a quote for deliveries outside nominated zones.

Delivery Requirements

Clearance required for truck and trailer is 19m long, 5m high, 3.5m wide. To put this into perspective, our trucks are longer than a semi-trailer.

It is the Owners responsibility to position the tank on the pad and to connect the tank.

Large and/or bulky products will require a lifting device (forklift etc) to unload from the truck. This is not supplied by the driver.

Re-Scheduling Fee

Please be advised that if the Owner chooses to change the delivery date a re-scheduling fee may be incurred.

For more information visit <https://www.polymaster.com.au/news/requirements-for-tank-deliveries/>

Polymaster Tank Installation Guide

1. No Entry Required

Installation of a Polymaster tank does not require entry into the tank.

2. Tank Site Preparation

The site must be firm, level, and flat. A concrete pad or a well-compacted sand base (75mm–100mm deep) is recommended. Other suitable bases include crushed dust or consolidated fill, free of rocks, stones, or sharp objects. The base should extend 600mm beyond the tank's diameter. A retaining wall should support the base's perimeter to prevent erosion.


3. Overflow & Drainage

The overflow must be piped away from the tank to avoid undermining the base.

4. Plumbing & Pipework

A flexible hose (minimum 300mm/12") must be installed after the tank valve to absorb shocks and movement.

If the tank is placed on a stand, do not support any pipework directly from the tank. Note: Failure to properly install tank as per instructions will void warranty. Never enter a tank alone. Have an attendant stand by. Restricted Space - only enter after carrying out a Hazard Identification Risk Assessment (H.I.R.A.).

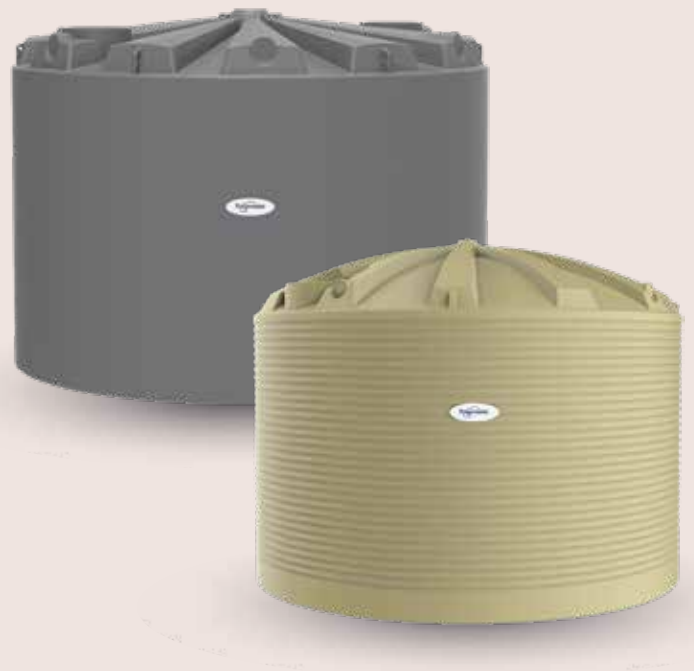

Free Delivery (Within Zone 1)

Polymaster offers free delivery to site throughout most of Victoria, South Australia and parts of New South Wales & Queensland for tanks exceeding 13,000Ls (within zone 1). Please refer to our free delivery zone map on polymaster.com.au/delivery-installation.

All tanks less than 13,000L are delivered free to store (within zone 1).
A delivery fee will be incurred to deliver these tanks to site.







1800 062 064
polymaster.com.au

Search **Polymaster** online.



SCAN TO VIEW
ONLINE